




Ultraleather® | Promessa®



EPA-registered antimicrobial protection

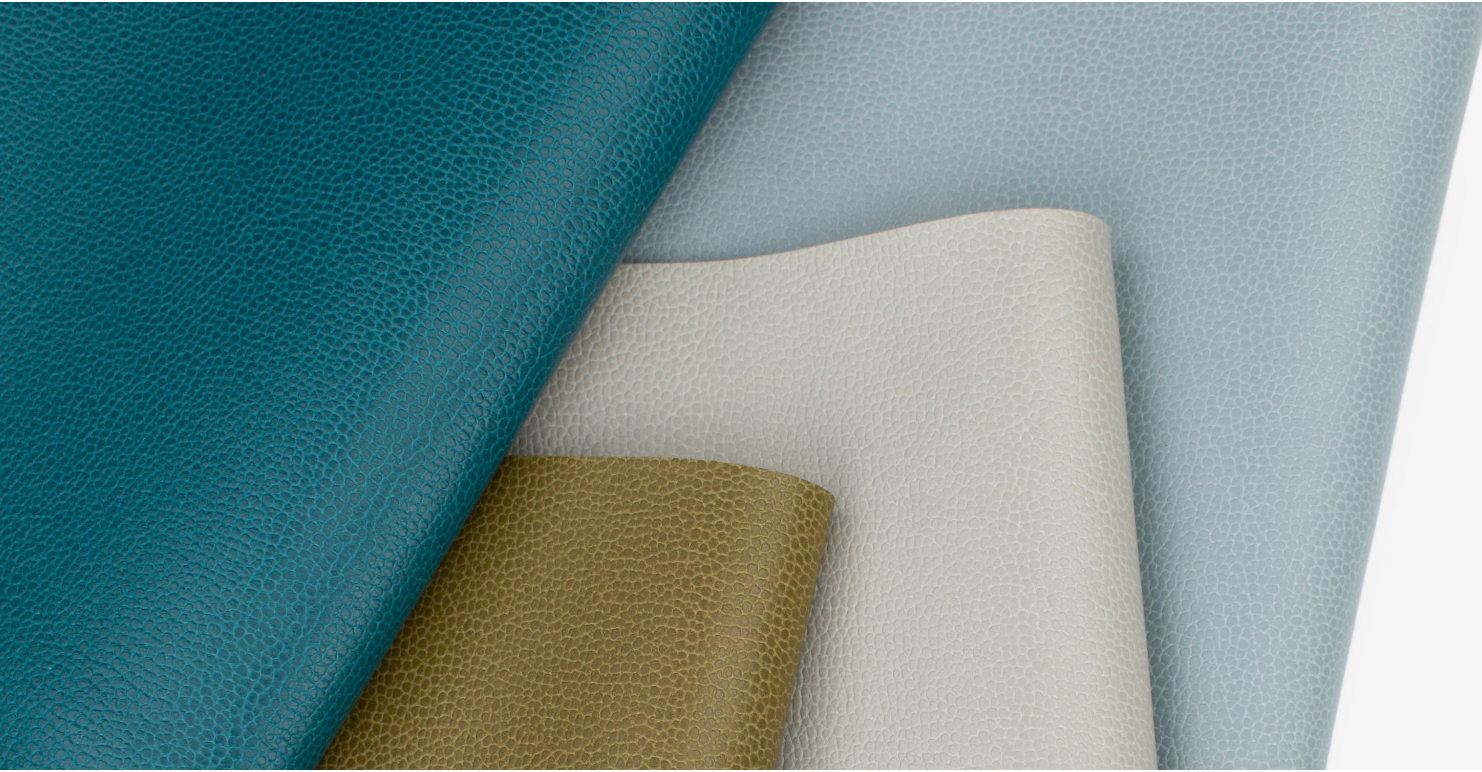

Antimicrobial

Ultraleather® | Promessa®



363-3152 Parchment




363-5715 Snow




363-3464 Tusk




363-5818 Ash




363-3463 Cocoa




363-3391 Sparrow




363-5817 Shale




363-5011 Battleship



363-5845 Ebony




363-3462 Woodpecker



363-3037 Horsehair




363-5848 Pearl




363-5263 Mustard



363-3140 Saddle




363-2695 Aquamarine




363-4515 Shetland




363-3036 Linen




363-5258 Sun Shower




363-3145 Bronze




363-2604 Stone Blue




363-7309 Malibu




363-3189 Barley




363-3139 Cashmere




363-1396 Blood Orange




363-2680 Atlantic




363-4481 Scallion




363-3148 Briarwood




363-3142 Camel




363-1387 Dogwood




363-2672 Corn Flour




363-7273 Aspen Green




363-3141 Fields




363-3143 Tudor




363-1398 Cactus Pear



363-9387 Moroccan Fig




363-4514 Moss




363-3195 Mesquite




363-3224 Brown Earth



363-9414 Merlot



363-9371 Beet



363-4516 Hunter



Antimicrobial

Ultraleather® | Promessa®

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Polyester, 35% Rayon Backing

Weight:

Approx. 11.5 oz. Per Square Yard
Approx. 390 Grams Per Square Metre

Thickness:

Approx. 1.1 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 180,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

14+ Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Antimicrobial: ASTM E2180

Tensile Strength: BS EN ISO 1421

Colorfastness

Light Fastness:

AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking:

AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- BS 5867 Part 2 Type B
- BS 7175
- FAR Specifications
- IMO Part 8
- NFPA 701

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

