



Brisa[®] | Original



Breathable technology • Acoustical properties




Breathable



Custom

Brisa® | Original

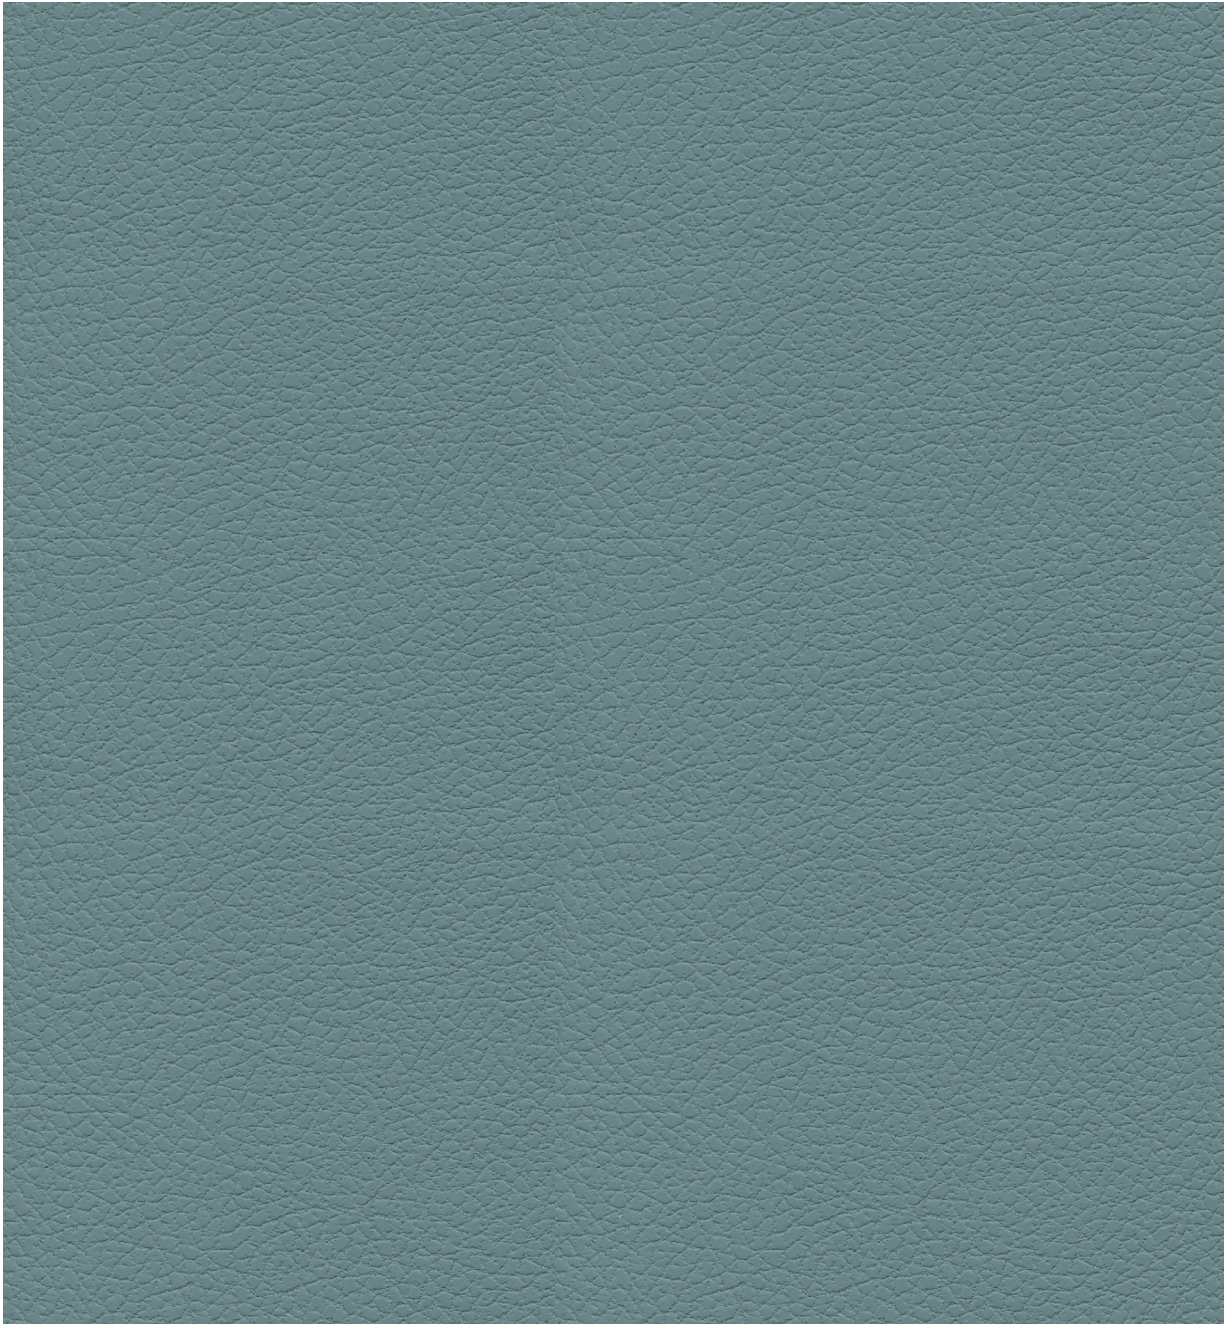

303-2697 Mineral



303-5747 White*



303-5820 Quicksilver*



303-5802 Ash*



303-5703 Wrought Iron*



303-5749 Black Onyx*



303-3019 Birch*




303-5234 Cameo



303-3822 Bone*



303-3946 New Sand*



303-3051 Ginger*



303-3866 French Vanilla



303-3863 Cream*



303-3864 Desert Clay*



303-5245 Tulle



303-3914 Bark*




303-3960 Camel



303-3056 Garbanzo



303-3048 Deep Bronze



303-3200 Peat



303-3022 Shiitake*



303-3867 Golden



303-3823 Aztec*




303-3591 Caramel



303-3825 Canyon*



303-3913 Truffle*



303-8245 Cinnabar*



303-1383 Pompeian Red*




303-1344 Rose Red



303-1386 Hollyhock



303-9400 Cabernet*



303-1373 Salsa*



303-9374 Blossom*



303-9335 Eggplant



303-9378 Abyss*



303-3023 Coffee Bean*

***Color also available in style 533 featuring 65% polyester/35% rayon backcloth.**




303-3814 Fog



303-3915 Putty*



303-4449 Sweet Pea



303-4487 Sage*



303-4510 Celery*




303-3199 Woodbine




303-4488 Olive



303-4448 Apple Green*



303-2697 Mineral*




303-2698 Sterling Blue*




303-4489 Basil




303-2545 Ink




303-2696 Skyway*




303-2645 Cambridge Blue*



303-2523 Turq*



303-2694 Night Navy*



303-2683 Indigo*



Breathable



Custom

Brisa® | Original

General Specifications

Composition:

100% Polyurethane Surface

100% Reinforced Rayon Backing

65% Polyester, 35% Rayon Backing**

Weight:

Approx. 9.2-9.3** oz. Per Square Yard

Approx. 310-315** Grams Per Square Metre

Thickness:

Approx. 1.0 Millimetres

Width:

54 Inches / 137 Centimetres

Performance

Abrasion:

ASTM D4157 / 200,000-300,000** Double Rubs (Wyzenbeek)*

BS 2543 / 120,000-160,000** Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

14+ Weeks

ASTM D3690-02 SECT. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating:

ASTM D751

Tear Strength:

ASTM D2261

Breaking Strength:

ASTM D5034

Air Permeability:

ASTM D737

Sound Absorption:

ASTM C423

Colorfastness

Light Fastness:

AATCC 16.3, 200 Hours, Grade 4-5

Crocking:

AATCC 8, Class 5 Wet & Dry

Flammability

F/R Rating:

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

Other Tests*:

- ASTM E84 (Unadhered)
- BS 5852 PT 0, 1 & 5 (Crib 5)
- BS 5867 Part 2 Type B
- BS 7175
- California Technical Bulletin 133
- FAR Specifications
- IMO A.652 (16)
- NFPA 701

*These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform well under these fire test conditions.

Earth Friendly

• GREENGUARD Certified

- Meets stringent VOC emission standards
- Promotes healthier indoor air quality
- Contributes to LEED™ and BIFMA level® credits

- Compliant with Prop 65
- No Conflict Minerals
- No Flame Retardants (ex. Halogenated, Brominated)
- No PBDEs (Polybrominated Diphenyl Ethers)
- No Plasticizers, Heavy Metals, Stabilizers, Phthalates or Bisphenol A (BPA)
- No POPs (Persistent Organic Pollutants)
- No PVC (Polyvinyl Chloride)
- No toxic by-products
- Over 99% of solvents recaptured and recycled

For more information on our fabrics, cleaning and care instructions, please visit our website.

****533 construction**



PRODUCT
CERTIFIED FOR
LOW CHEMICAL
EMISSIONS:
UL.COM/GG
UL2818

www.ultrafabricsllc.com

Ultrafabrics® and logo, and Brisa® are trademarks of Ultrafabrics, LLC. Made in Japan.

2/16

