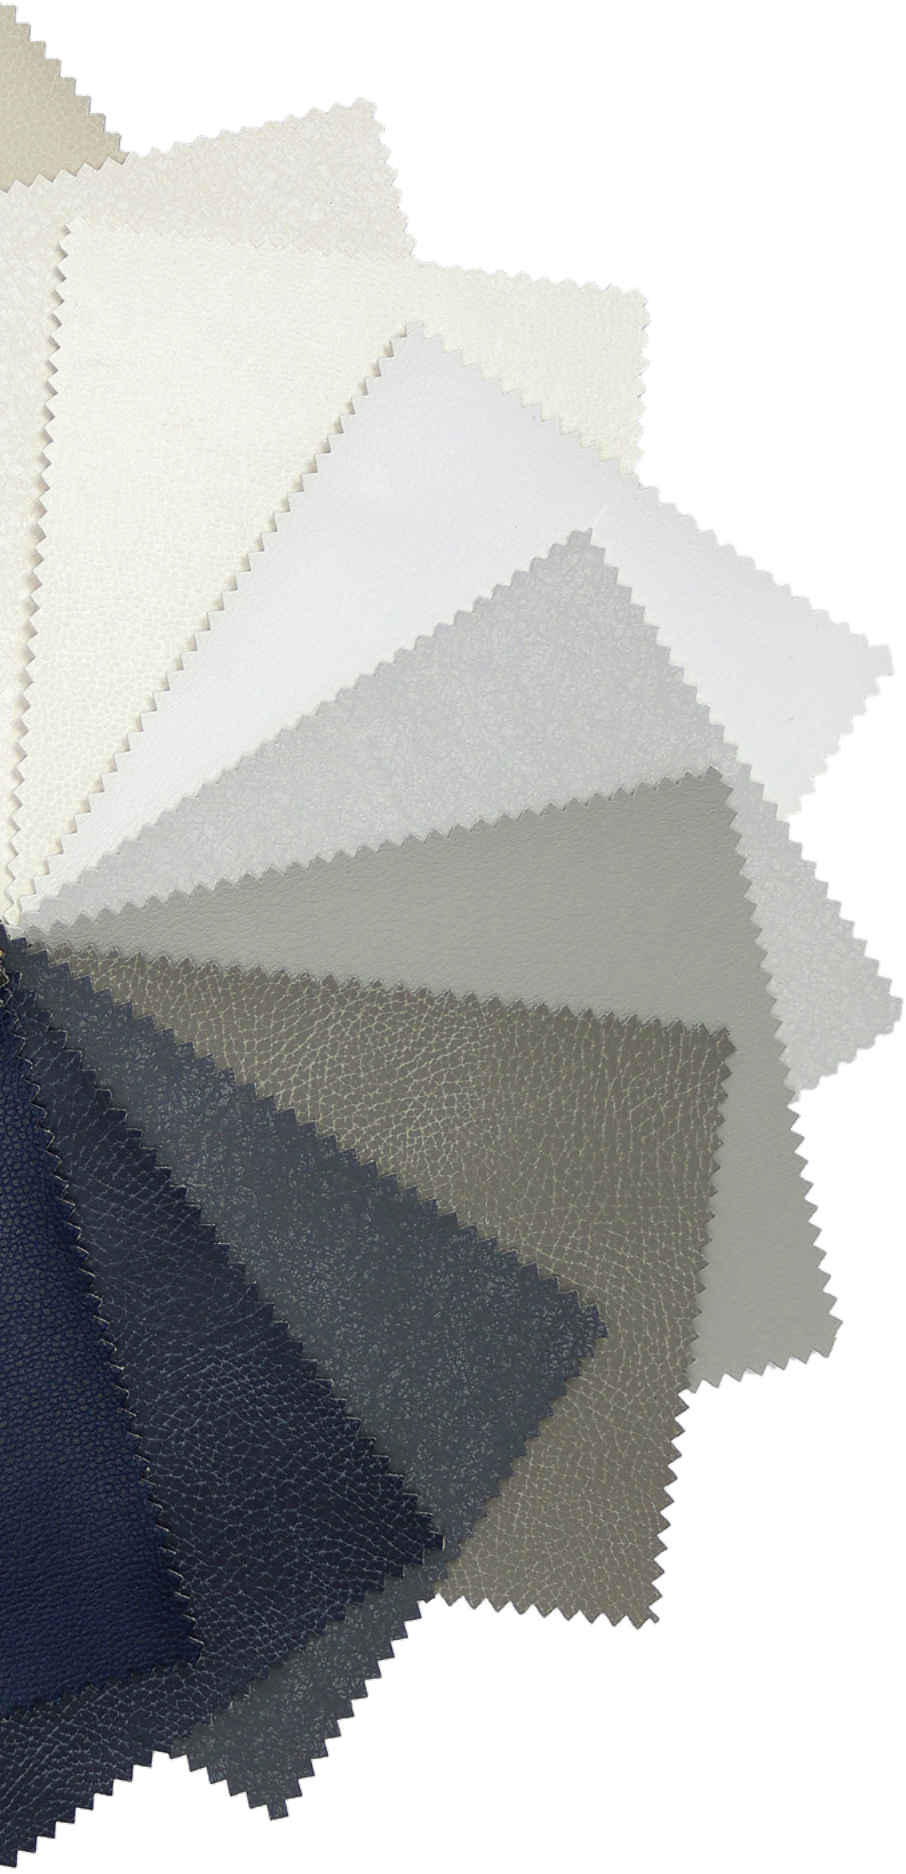

Ultraleather®
Outdoor Collection

Ultrafabrics®

Outdoor

Antimicrobial†

Ultraleather® | Pumice Outdoor — 497-0016 Sailboat

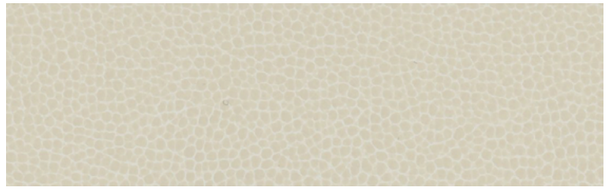

Ultraleather® | Pebble Outdoor — 540-3319 Sand Dollar

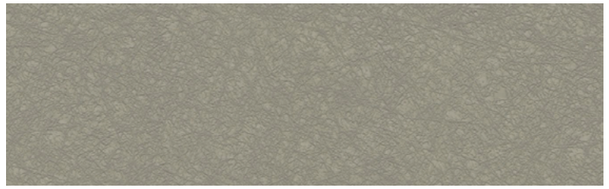

Ultraleather® | Cora Outdoor — 410-5929 Greyhound

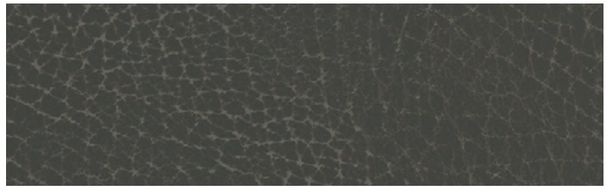

Ultraleather® | Distressed Outdoor — 421-5002 Chocolate

Ultraleather® | Promessa® Outdoor — 383-5765 New Moon

410-5220 Limoncello

410-4390 New Leaf

410-1332 Red Clay

410-2564 Aura

421-1323 Atomic Red



421-2510 Atomic Blue

410-9315 Wildberry



421-2615 Cadet Blue

410-2637 Blue Moon



383-2693 Marine Midnight

497-0016 Sailboat

497-3260 Seahorse

410-3225 Harmony

410-3506 Posh

410-0002 Frozen

383-5805 Ermine



383-3619 Linen

540-3226 Caramelo

421-3357 Cream

497-5969 Propeller

410-5920 Icing

421-3261 Clairmont



421-3346 Walden

410-5929 Greyhound

383-5765 New Moon

497-0017 Whitewater

410-3428 Honey Wheat

410-3250 Cigar



421-3578 Stone

410-5904 Blackout



540-3319 Sand Dollar

421-3270 Barro

421-5002 Chocolate

410-5923 Setter

Outdoor Antimicrobial†

Ultraleather® | Outdoor Collection

General Specifications

Composition:
100% Polycarbonate Polyurethane Surface
65% Polyester, 35% Rayon Backing

Weight:
Approx. 10.6 - 11.9 oz. Per Square Yard
Approx. 360 - 390 Grams Per Square Metre

Thickness:
Approx. 1.1 - 1.2 Millimetres

Width:
54 Inches / 137 Centimetres

Performance

Abrasion:
ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*
BS 2543 / 160,000 - 200,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:
14+ Weeks
ASTM D3690-02 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating:	ASTM D751
Tear Strength:	ASTM D2261
Breaking Strength:	ASTM D5034
Antibacterial†:	AATC 147
Antimicrobial†:	ASTM E2180
Anti-mildew:	ASTM G21

Colorfastness

UV:	ASTM G154, 1000 Hours
Light Fastness:	AATCC 16.3, 200 Hours, Grade 4
Crocking:	AATCC 8, Grade 4-5 Wet & Dry
Chlorinated Water:	AATCC 162, Class 4-5
Perspiration:	AATCC 15, Class 5
Sea (Salt) Water:	AATCC 106, Class 4-5

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 PT 0, 1 & 5 (Crib 5)
- BS 5867 Part 2 Type B
- BS 7175
- FAR Specifications
- IMO A.652 (16)
- NFPA 701

Certificates and Standards

- SCS Indoor Advantage Gold Certified
  - Meets stringent chemical emission limits for various VOCs (eg. Formaldehyde)
  - Promotes healthier indoor air quality
  - Contributes towards satisfying credits under LEED® and BIFMA
  - Compliant with California Section 01350

† Excludes Promessa®

For more information on our fabrics, cleaning and care instructions, please visit our website.

INDOOR ADVANTAGE GOLD FURNITURE

ultrafabricsinc.com

Ultrafabrics® and logo, Ultraleather® and Promessa® are trademarks of Ultrafabrics Inc. Made in Japan.

6/19