




Ultraleather® | Outdoor Collection



EPA-registered anti-mildew, antibacterial[†], and antimicrobial[†] protection • Solar endurance

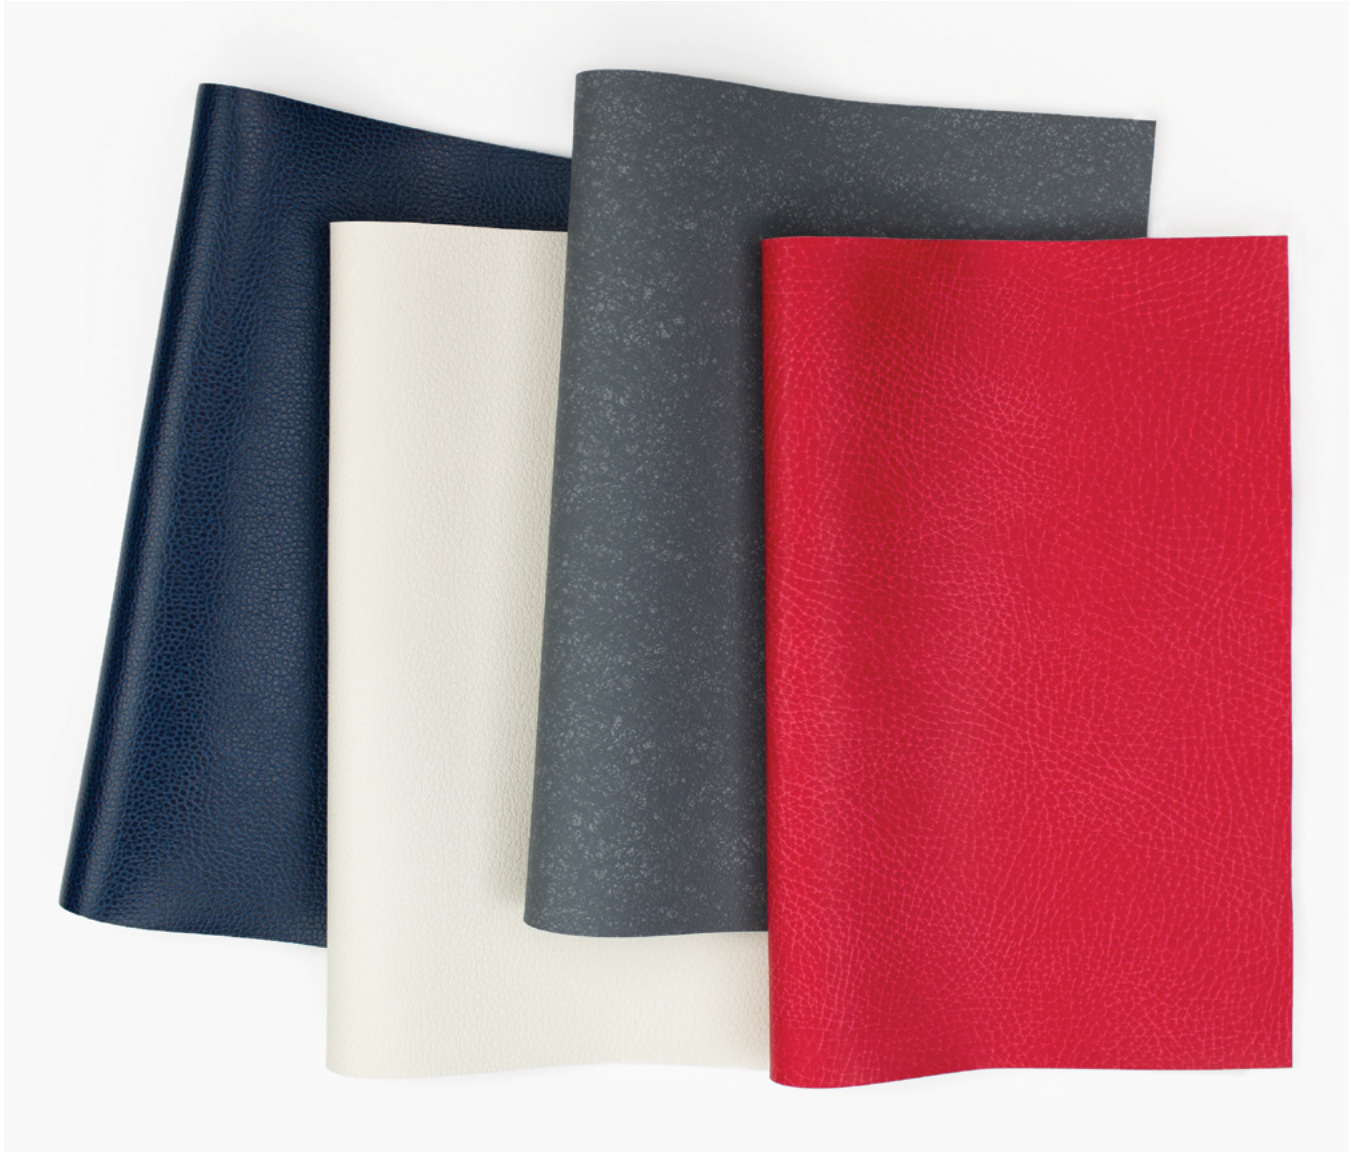


Outdoor




Antimicrobial†

Ultraleather® | Outdoor Collection

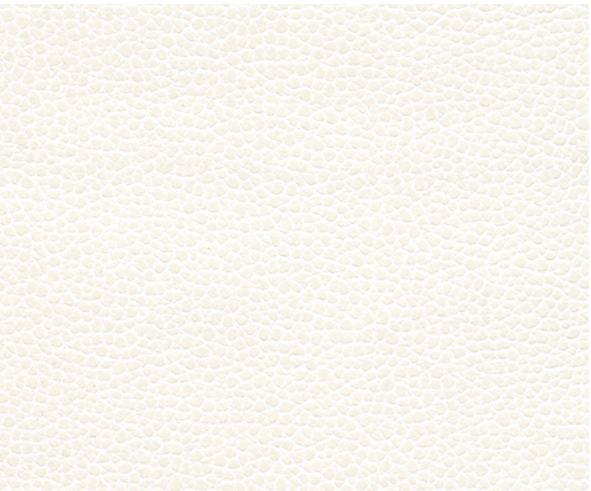

383-5805 Ermine

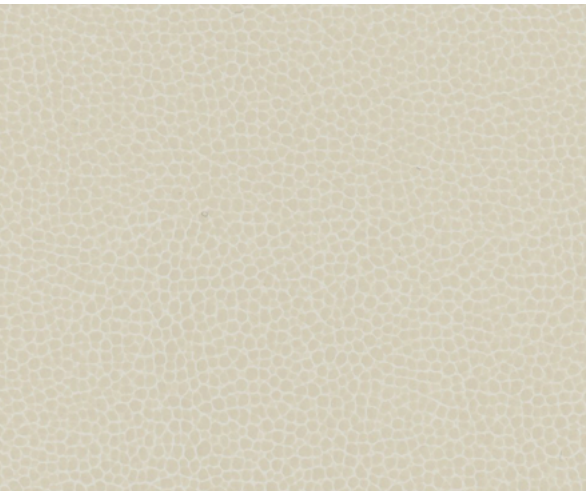


540-3319 Sand Dollar



497-3260 Seahorse




410-3428 Honey Wheat

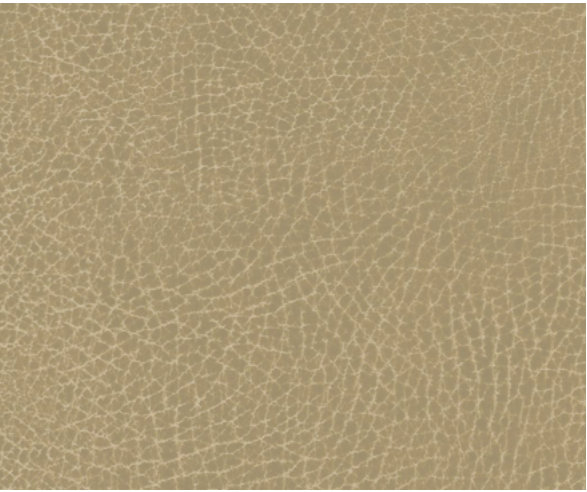


421-3270 Barro




497-0016 Sailboat



410-5920 Icing




410-5220 Limoncello




410-4390 New Leaf




410-0002 Frozen



497-0017 Whitewater



383-3619 Linen




540-3226 Caramello



410-2564 Aura




497-5969 Propeller




421-3357 Cream




421-3261 Clairmont



410-3250 Cigar



421-2510 Atomic Blue




410-5923 Setter




410-5929 Greyhound




410-3506 Posh




410-1332 Red Clay



383-2693 Marine Midnight



383-5765 New Moon




421-3578 Stone



410-3225 Harmony




421-1323 Atomic Red




421-2615 Cadet Blue



410-5904 Blackout




421-5002 Chocolate



421-3346 Walden



410-9315 Wildberry



410-2637 Blue Moon



Outdoor



Antimicrobial†

Ultraleather® | Outdoor Collection

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Polyester, 35% Rayon Backing

Weight:

Approx. 10.6 - 11.9 oz. Per Square Yard
Approx. 360 - 390 Grams Per Square Metre

Thickness:

Approx. 1.1 - 1.2 Millimetres

Width:

54 Inches / 137 Centimetres

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*
BS 2543 / 160,000 - 200,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

14+ Weeks
ASTM D3690-02 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Antibacterial†: AATC 147

Antimicrobial†: ASTM E2180

Anti-mildew: ASTM G21

Colorfastness

UV:

ASTM G154, 1000 Hours

Light Fastness:

AATCC 16.3, 200 Hours, Grade 4

Crocking:

AATCC 8, Grade 4-5 Wet & Dry

Chlorinated Water:

AATCC 162, Class 4-5

Perspiration:

AATCC 15, Class 5

Sea (Salt) Water:

AATCC 106, Class 4-5

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 PT 0, 1 & 5 (Crib 5)
- BS 5867 Part 2 Type B
- BS 7175
- FAR Specifications
- IMO A.652 (16)
- NFPA 701

Certificates and Standards

- SCS Indoor Advantage Gold Certified
 - Meets stringent chemical emission limits for various VOCs (eg. Formaldehyde)
 - Promotes healthier indoor air quality
 - Contributes towards satisfying credits under LEED® and BIFMA
 - Compliant with California Section 01350

† Excludes Promessa*

For more information on our fabrics, cleaning and care instructions, please visit our website.



INDOOR ADVANTAGE GOLD
FURNITURE

Ultrafabrics® and logo, Ultraleather® and Promessa® are trademarks of Ultrafabrics Inc. Made in Japan.

7/19

ultrafabricsinc.com

