



Ultraleather® | Outdoor Collection



EPA-registered anti-mildew, antibacterial[†], and antimicrobial[†] protection • Solar endurance

For Contract, Hospitality and Residential Applications




Outdoor




Antimicrobial†

Ultraleather® | Outdoor Collection

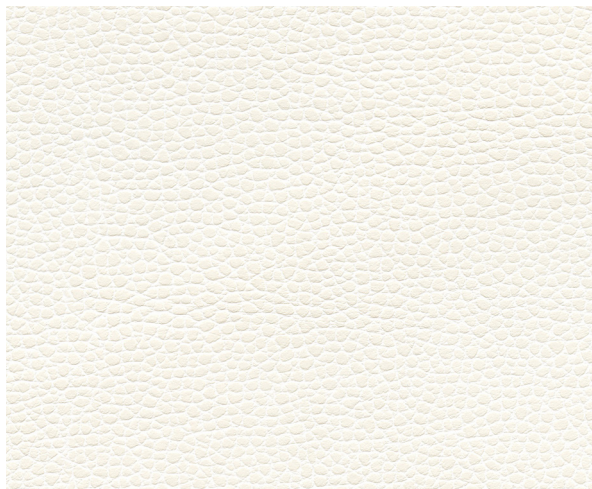

383-5805 Ermine

Promessa® Outdoor

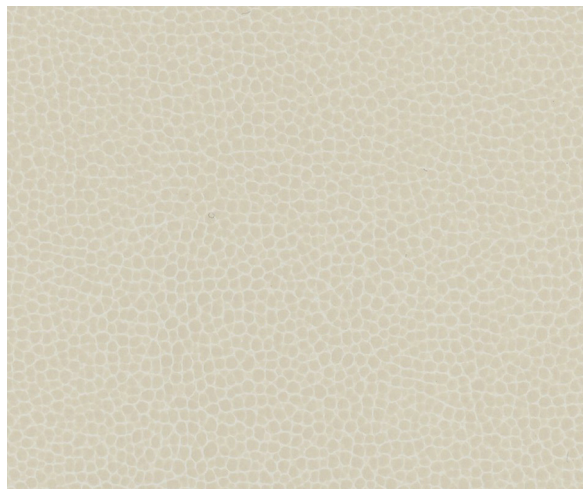

540-3319 Sand Dollar

Pebble Outdoor



497-3260 Seahorse

Pumice Outdoor




410-3428 Honey Wheat

Cora Outdoor




421-3270 Barro


Distressed Outdoor




497-0016 Sailboat



410-5920 Icing



410-5220 Limoncello




410-4390 New Leaf




410-0002 Frozen




497-0017 Whitewater



383-3619 Linen




540-3226 Caramello



410-2564 Aura



497-5969 Propeller




421-3357 Cream




421-3261 Clairmont




410-3250 Cigar



421-2510 Atomic Blue




410-5923 Setter




410-5929 Greyhound




410-3506 Posh




410-1332 Red Clay



383-2693 Marine Midnight




383-5765 New Moon




421-3578 Stone



410-3225 Harmony




421-1323 Atomic Red




421-2615 Cadet Blue




410-5904 Blackout



421-5002 Chocolate



421-3346 Walden



410-9315 Wildberry



410-2637 Blue Moon



Outdoor

Antimicrobial[†]

Ultraleather® | Outdoor Collection

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Polyester, 35% Rayon Backing

Weight:

Approx. 10.9 - 11.8 oz. Per Square Yard
Approx. 370 - 400 Grams Per Square Metre

Thickness:

Approx. 1.05 - 1.2 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

3.94"V x 3.66"H / 100mm V x 93mm H
(Cora Outdoor)
8"V x 10.5"H / 203mm V x 267mm H
(Distressed Outdoor)

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 160,000 - 200,000 Rubs
(Martindale)*
*meets or exceeds

Hydrolysis:

14+ Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

Antibacterial[†]: AATCC 147

Antimicrobial[†]: ASTM E2180

Anti-mildew: ASTM G21

Colorfastness

UV:

ASTM G154, 1000 Hours

Light Fastness:

AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking:

AATCC 8, Grade 4-5 Wet & Dry

Chlorinated Water:

AATCC 162, Class 4-5

Perspiration:

AATCC 15, Class 5

Sea (Salt) Water:

AATCC 106, Class 4-5

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib5)
- BS 5867 Part 2 Type B
- BS 7175
- FAR Specifications
- IMO Part 8
- NFPA 701

[†]Excludes Promessa® Outdoor

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

This card is meant for Contract, Hospitality and Residential applications. For marine applications, please contact the Ultrafabrics marine sales group at marine@ultrafabricsinc.com to discuss specific marine requirements and suitable options.



INDOOR ADVANTAGE GOLD
FURNITURE

Ultrafabrics® and logo, Ultraleather® and Promessa® are trademarks of Ultrafabrics Inc. Made in Japan.

ultrafabricsinc.com



4/20