




Brisa® | Original Outdoor

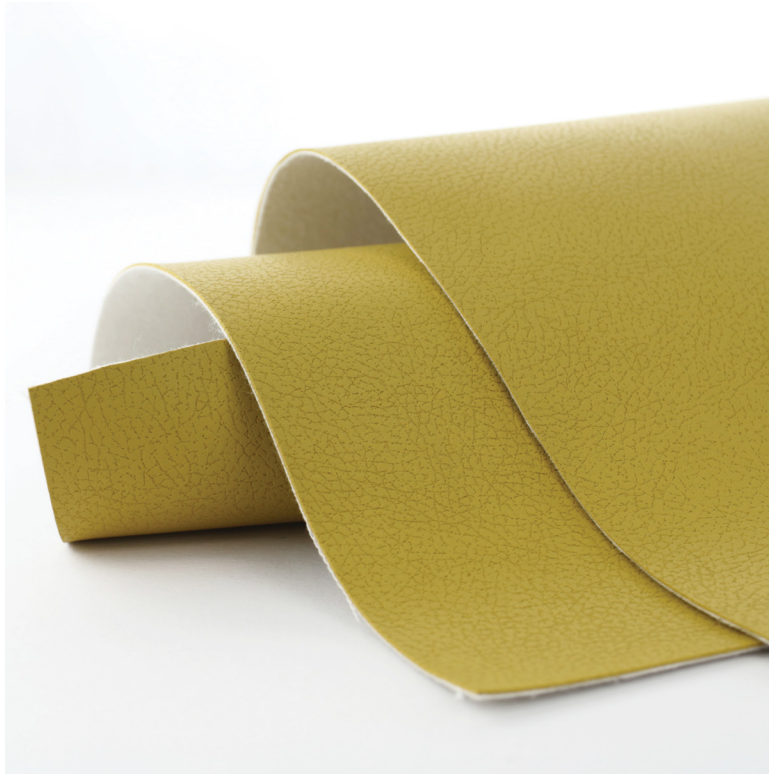

Boundary pushing performance inside or out is the highlight of one of our brightest innovations. First in its class, **Brisa® | Original Outdoor** features a subtly textured aesthetic and a well-balanced color palette. This collection provides ultimate seating comfort and softness, while other enhancements include water repellency, EPA-registered mildew defense, solar endurance and colorfastness. Discover beauty, comfort and protection in one environment-flexible package.

Distinctive Characteristics:

- Superior durability – industry-leading 14+ weeks hydrolysis results
- Blended backcloth for expanded upholstery capabilities
- 200,000 double rubs (Wyzenbeek), 180,000 rubs (Martindale)
- Breathable technology promotes airflow for ultimate seating comfort
- Bleach cleanable (1:5 bleach/water solution)

An intelligent solution – the **Brisa®** family of performance fabrics highlights boundary-pushing innovation where looks, feel and performance matter.



Outdoor



Breathable

Brisa® | Original Outdoor

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Polyester, 35% Rayon Backing

Weight:

Approx. 11.5 oz. Per Square Yard
Approx. 390 Grams Per Square Metre

Thickness:

Approx. 1.15 Millimetres

Width:

54 Inches / 137 Centimetres

Performance

Abrasion:

ASTM D4157 / 200,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 180,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

14+ Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

Air Permeability: ASTM D737

Anti-mildew: ASTM G21

Sound Absorption: ASTM C423

Colorfastness

UV:

ASTM G154, 1000 Hours

Light Fastness:

AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking:

AATCC 8, Grade 4-5 Wet & Dry

Chlorinated Water:

AATCC 162, Class 4-5

Perspiration:

AATCC 15, Class 5

Sea (Salt) Water:

AATCC 106, Class 4-5

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- BS 5867 Part 2 Type B
- BS 7175
- FAR Specifications
- IMO Part 8
- NFPA 701

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

