




# Ultraleather® | Pro

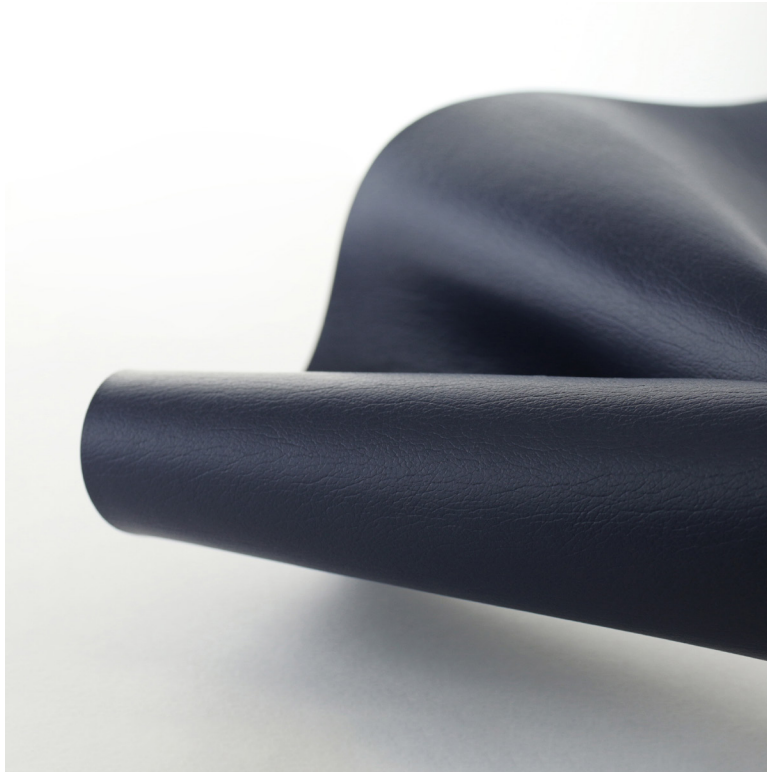

**Ultraleather® | Pro** is crafted with passion and purpose. Imbued with optimal durability, protection, and ease of care attributes, **Pro** maintains the Ultraleather reputation as the softest in its class and is infused with comfort and power combined. Added features include exceptional abrasion resistance, repellency of most stubborn stains like ink, denim dye, red wine, mustard, and iodine-based liquids, along with EPA-registered antimicrobial protection. An extensive color palette provides numerous options for upholstery applications.

#### Distinctive Characteristics:

- Superior durability – industry-leading 14+ weeks hydrolysis results
- Reinforced rayon backing
- 500,000 double rubs (Wyzenbeek), 200,000 rubs (Martindale)
- Bleach cleanable (1:5 bleach/water solution)
- EPA-registered antimicrobial protection does not contain triclosan and triclocarban
- SCS Indoor Advantage Gold Certification

Providing hard-working upholstery solutions – the Ultraleather® family redefines performance fabrics with classic aesthetics and authentic softness.



Antimicrobial



Ink & Stain Resistant

# Ultraleather® | Pro

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
100% Reinforced Rayon Backing

### Weight:

Approx. 9.7 oz. Per Square Yard  
Approx. 330 Grams Per Square Metre

### Thickness:

Approx. 0.95 Millimetres

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 500,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 200,000 Rubs (Martindale)\*  
\*meets or exceeds

### Hydrolysis:

14+ Weeks  
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

**Adhesion of Coating:** ASTM D751

**Tear Strength:** ASTM D2261

**Breaking Strength:** ASTM D5034

**Antimicrobial:** ASTM E2180

**Tensile Strength:** BS EN ISO 1421

## Colorfastness

**Light Fastness:** AATCC 16.3, 200 Hours, Grade 4  
ISO 105 B02, Grade 6

**Crocking:** AATCC 8, Grade 4-5 Wet & Dry

## Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- BS 5867 Part 2 Type B
- BS 7175
- FAR Specifications
- IMO Part 8
- NFPA 701

## Ultraleather | Pro Resists:

- Ballpoint ink
- Blood
- Mustard and Ketchup
- Betadine
- Denim\*
- Red Wine

\* Removal of denim dye may vary depending on the period of time the stain sets in. While Pro offers excellent protection, full removal is not guaranteed.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

